Blockchain Resistant to Quantum Attack

Michal Ľaš, supervised by Mgr. Kamil Malinka, Ph.D.

Goals

- Analyze blockchain components vulnerable to quantum attacks
- Identify appropriate post-quantum cryptography algorithms for use in a blockchain
- Design and implement a post-quantum blockchain
- Test implementation performance with different post-quantum cryptography algorithms

1 Threats

The main threat is the ability of quantum computers to break the currently used cryptography. For blockchains, it indicates:

- Threat for transactions integrity
- Threat to consensus mechanisms, mainly PoW
- Theoretical threat to the entire integrity of a blockchain

2 Solution & Design

Application Layer

Wallet

Replicated State Machine Layer

Transactions
Digital signatures Falcon and Dilithium

Consensus Layer

XRP Ledger Consensus Protocol
Digital signatures Falcon and Dilithium

Network Layer

Data storage
Chained with SHA-512

Network Services

Peer communication

Results

- The performance of PQ algorithms compared to the currently utilized ones is actually quite sufficient
- The primary issue is the size of PQ signatures and keys

3A

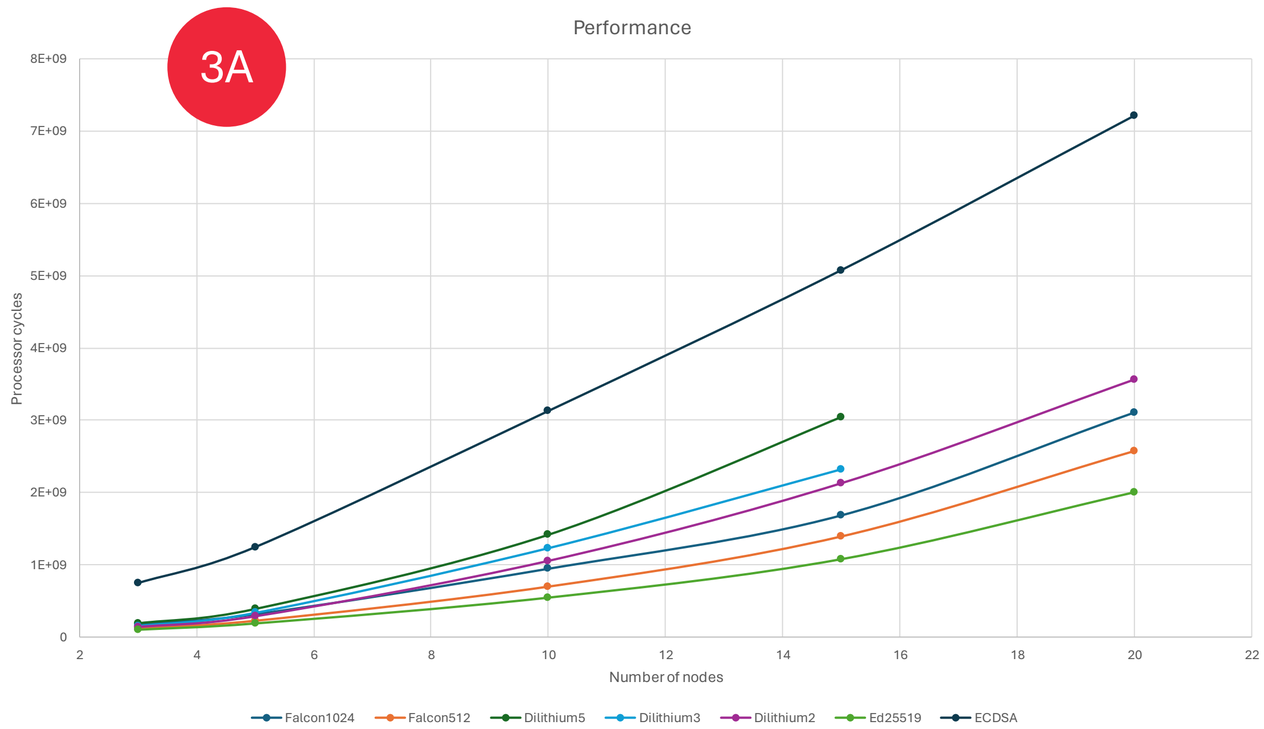

3B

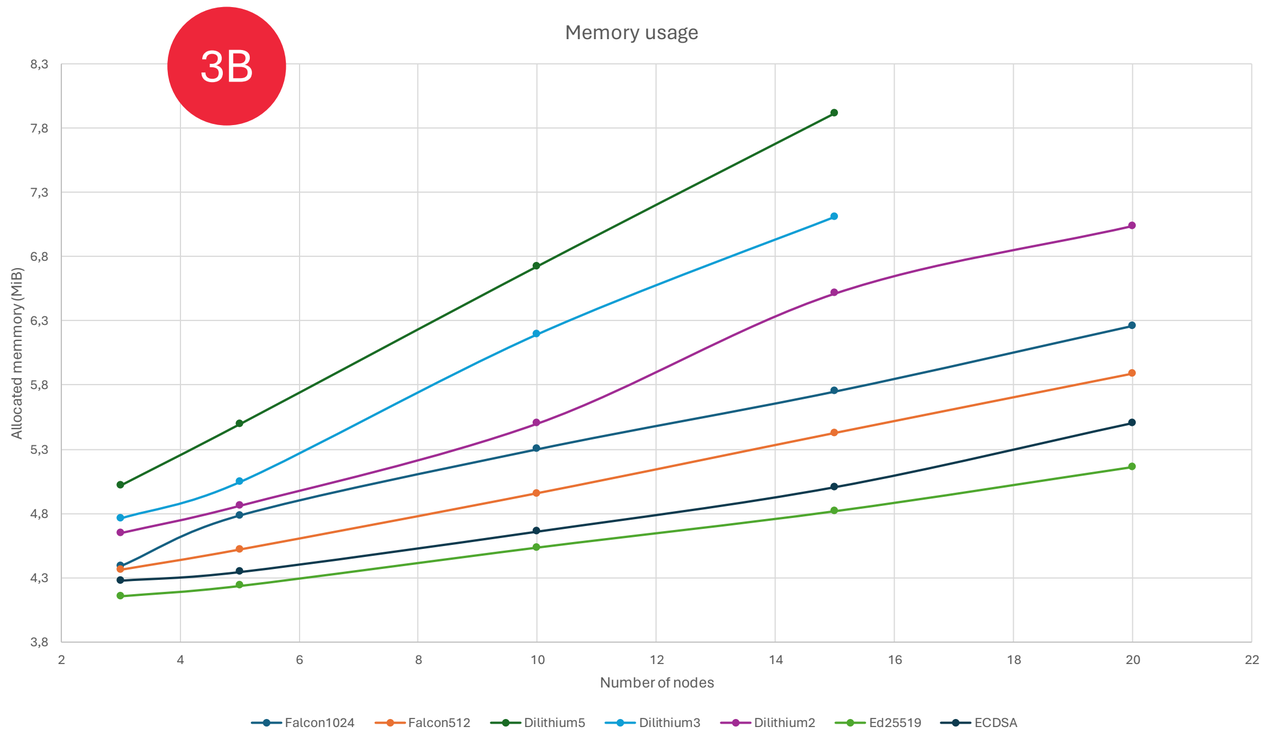
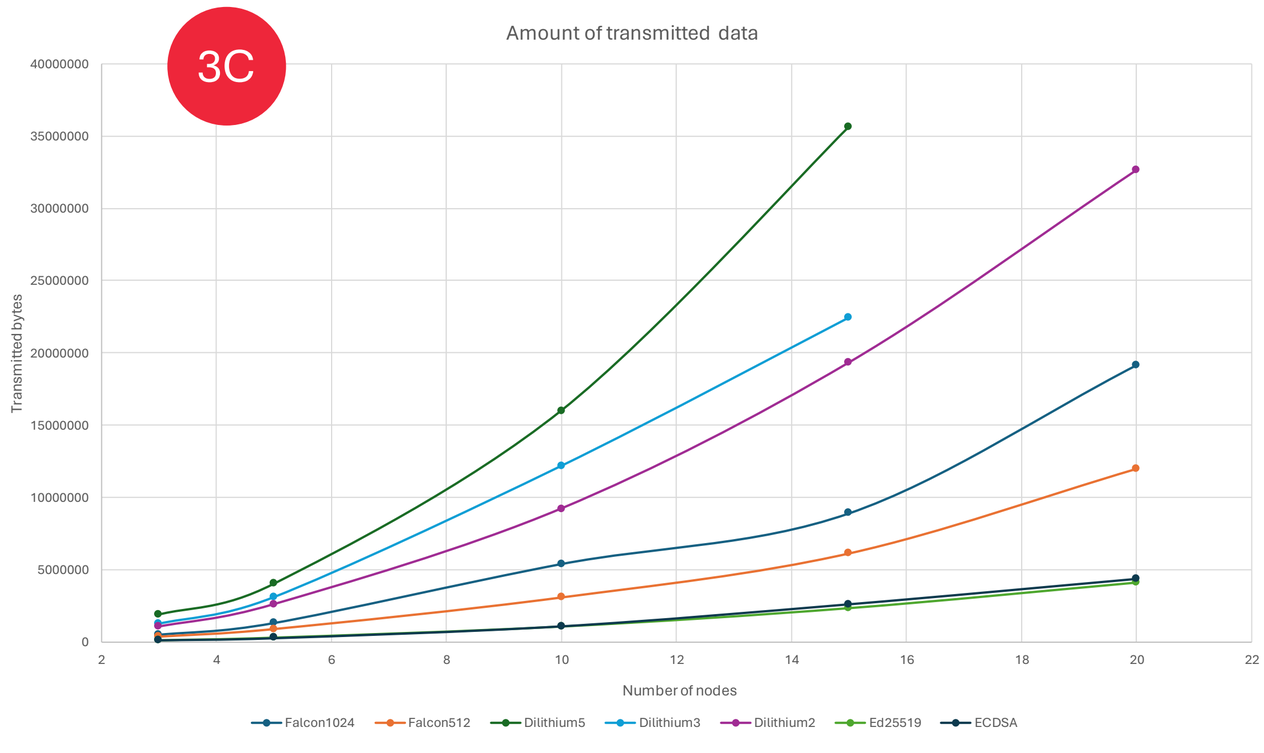
3C