



# TEXTURE RECONSTRUCTION FROM MULTIPLE VIEWS

Author: Bc. David Kedra (xkedra00@vutbr.cz)  
Supervisor: Ing. Michal Hradiš, Ph.D.

A deep learning model for high-resolution **texture reconstruction** and **image enhancement** of flat surfaces using images captured from multiple viewpoints under varying lighting conditions. The views are aligned to a reference image (which contains the required texture colors) using **homography** and SEA-RAFT **optical flow**. The reconstruction is performed by **CNNs**, mainly based on **U-Net** architectures, and the models are trained primarily on synthetic data generated in Blender.

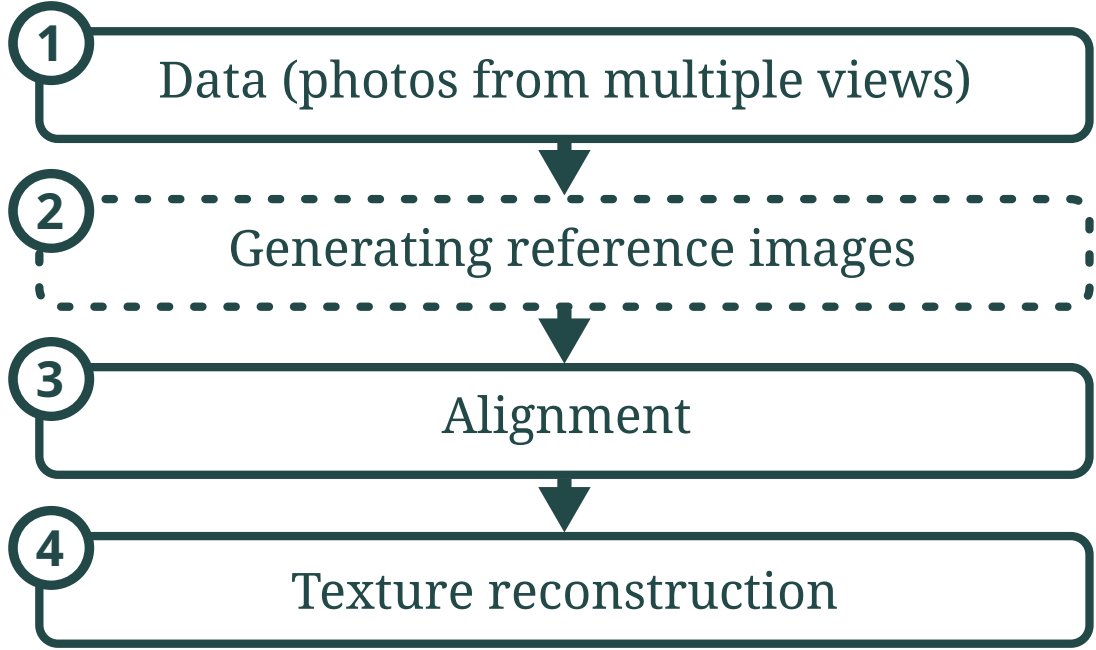

Scheme 1

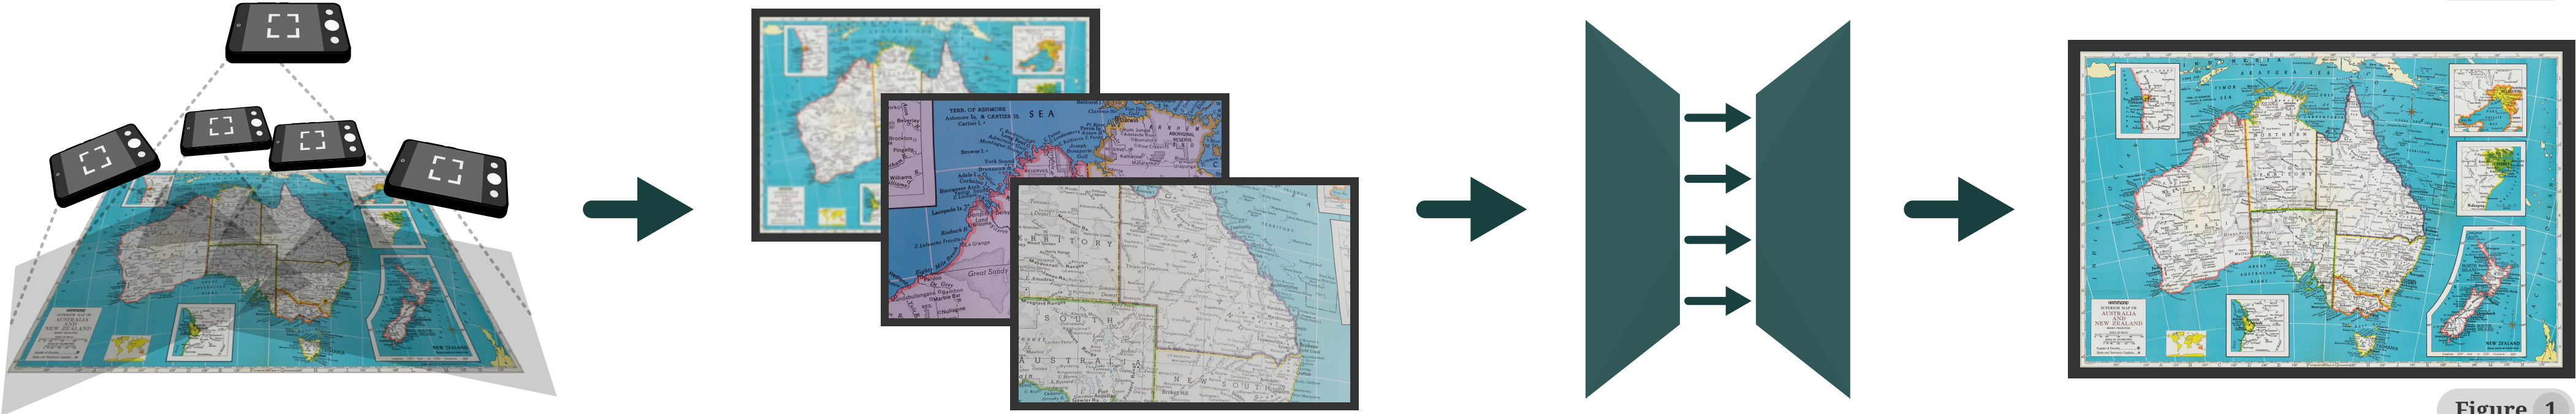


## 1 Synthetic & real data



Figure 2

## 2 Generating low-resolution reference images using realistic degradation of GT textures

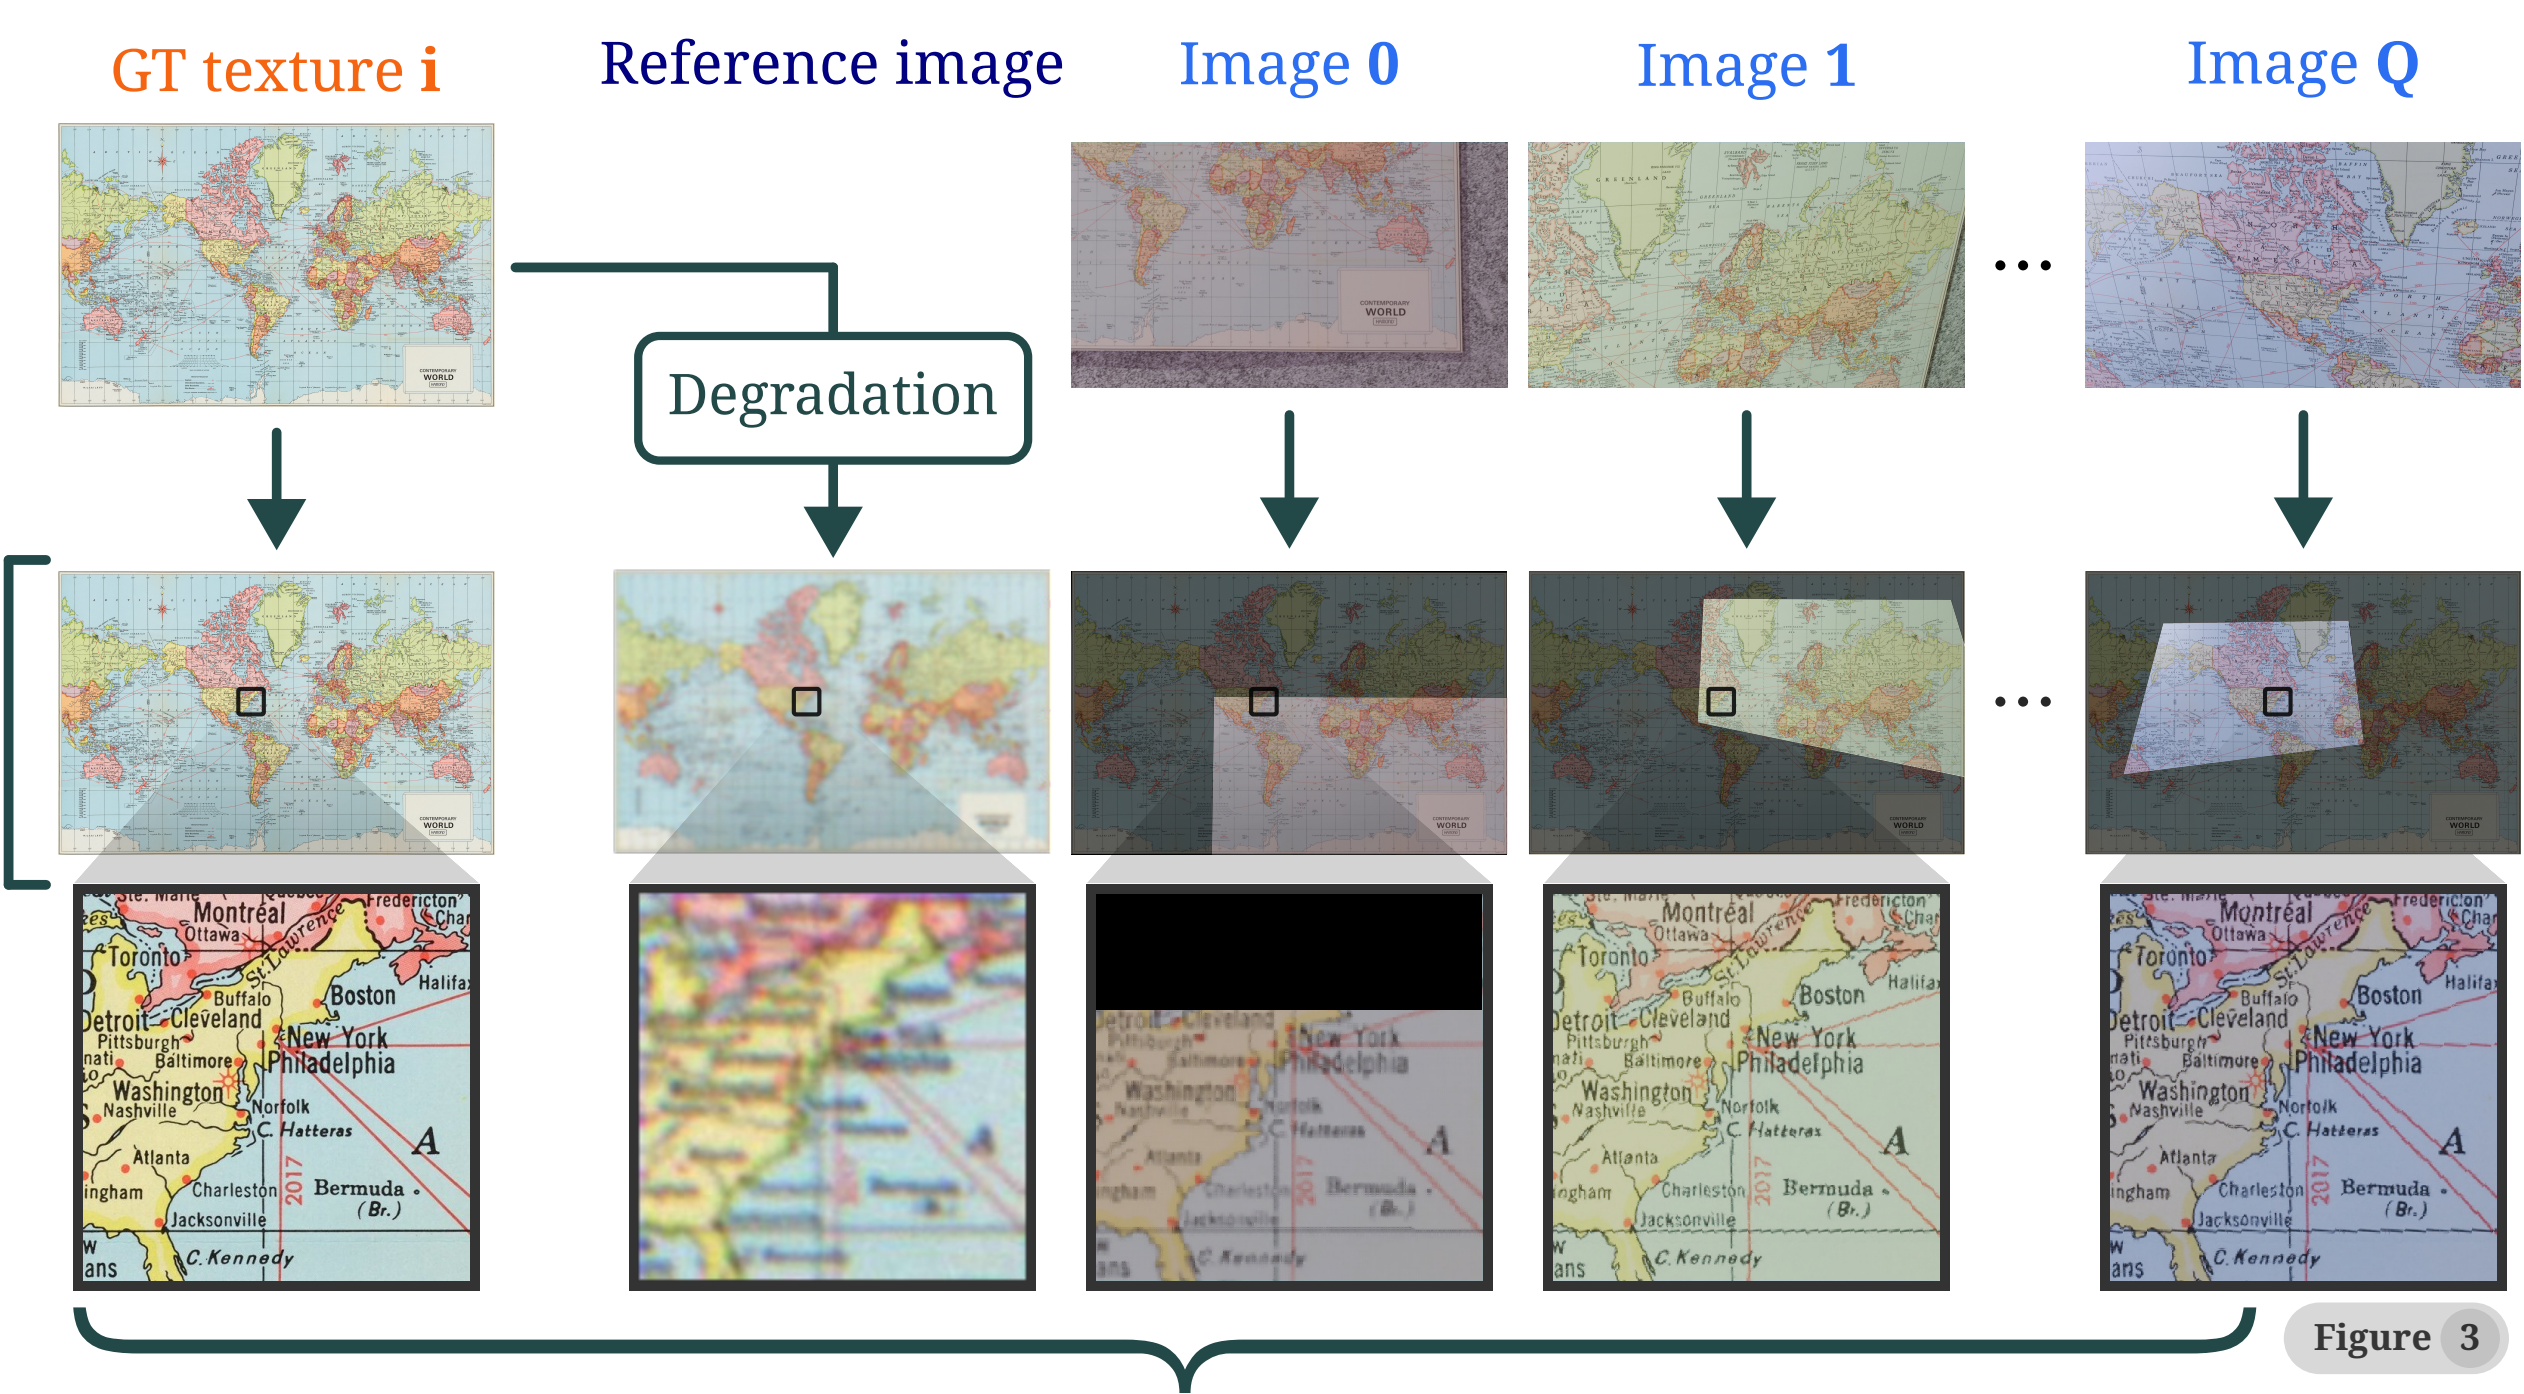

## 3 Accurate alignment to the reference view

- UV maps (synthetic images for training)
- homography + optical flow (real photos)

## Splitting images into patches (512×512 pixels)

Each training sample consists of **1 GT texture patch**, **1 reference view patch**, and other **N view patches** selected from a set of **Q** aligned input images (views) at the specific position (for the project **N** was set as **5**).

## 5 Texture reconstruction (reference image enhancement)

**Table 1:** The models are named by encoder-decoder types. MV\_EDSR denotes a multi-view variant of EDSR.

	Scene A		Scene B	
	PSNR	SSIM	PSNR	SSIM
MV_EDSR	21.44	0.58	22.06	0.74
ResNet34_U-Net	21.83	0.60	22.02	0.74
MiT_U-Net	22.31	0.61	22.47	0.74
ResNet101_UNet++	22.01	0.61	22.76	0.75

Table 1

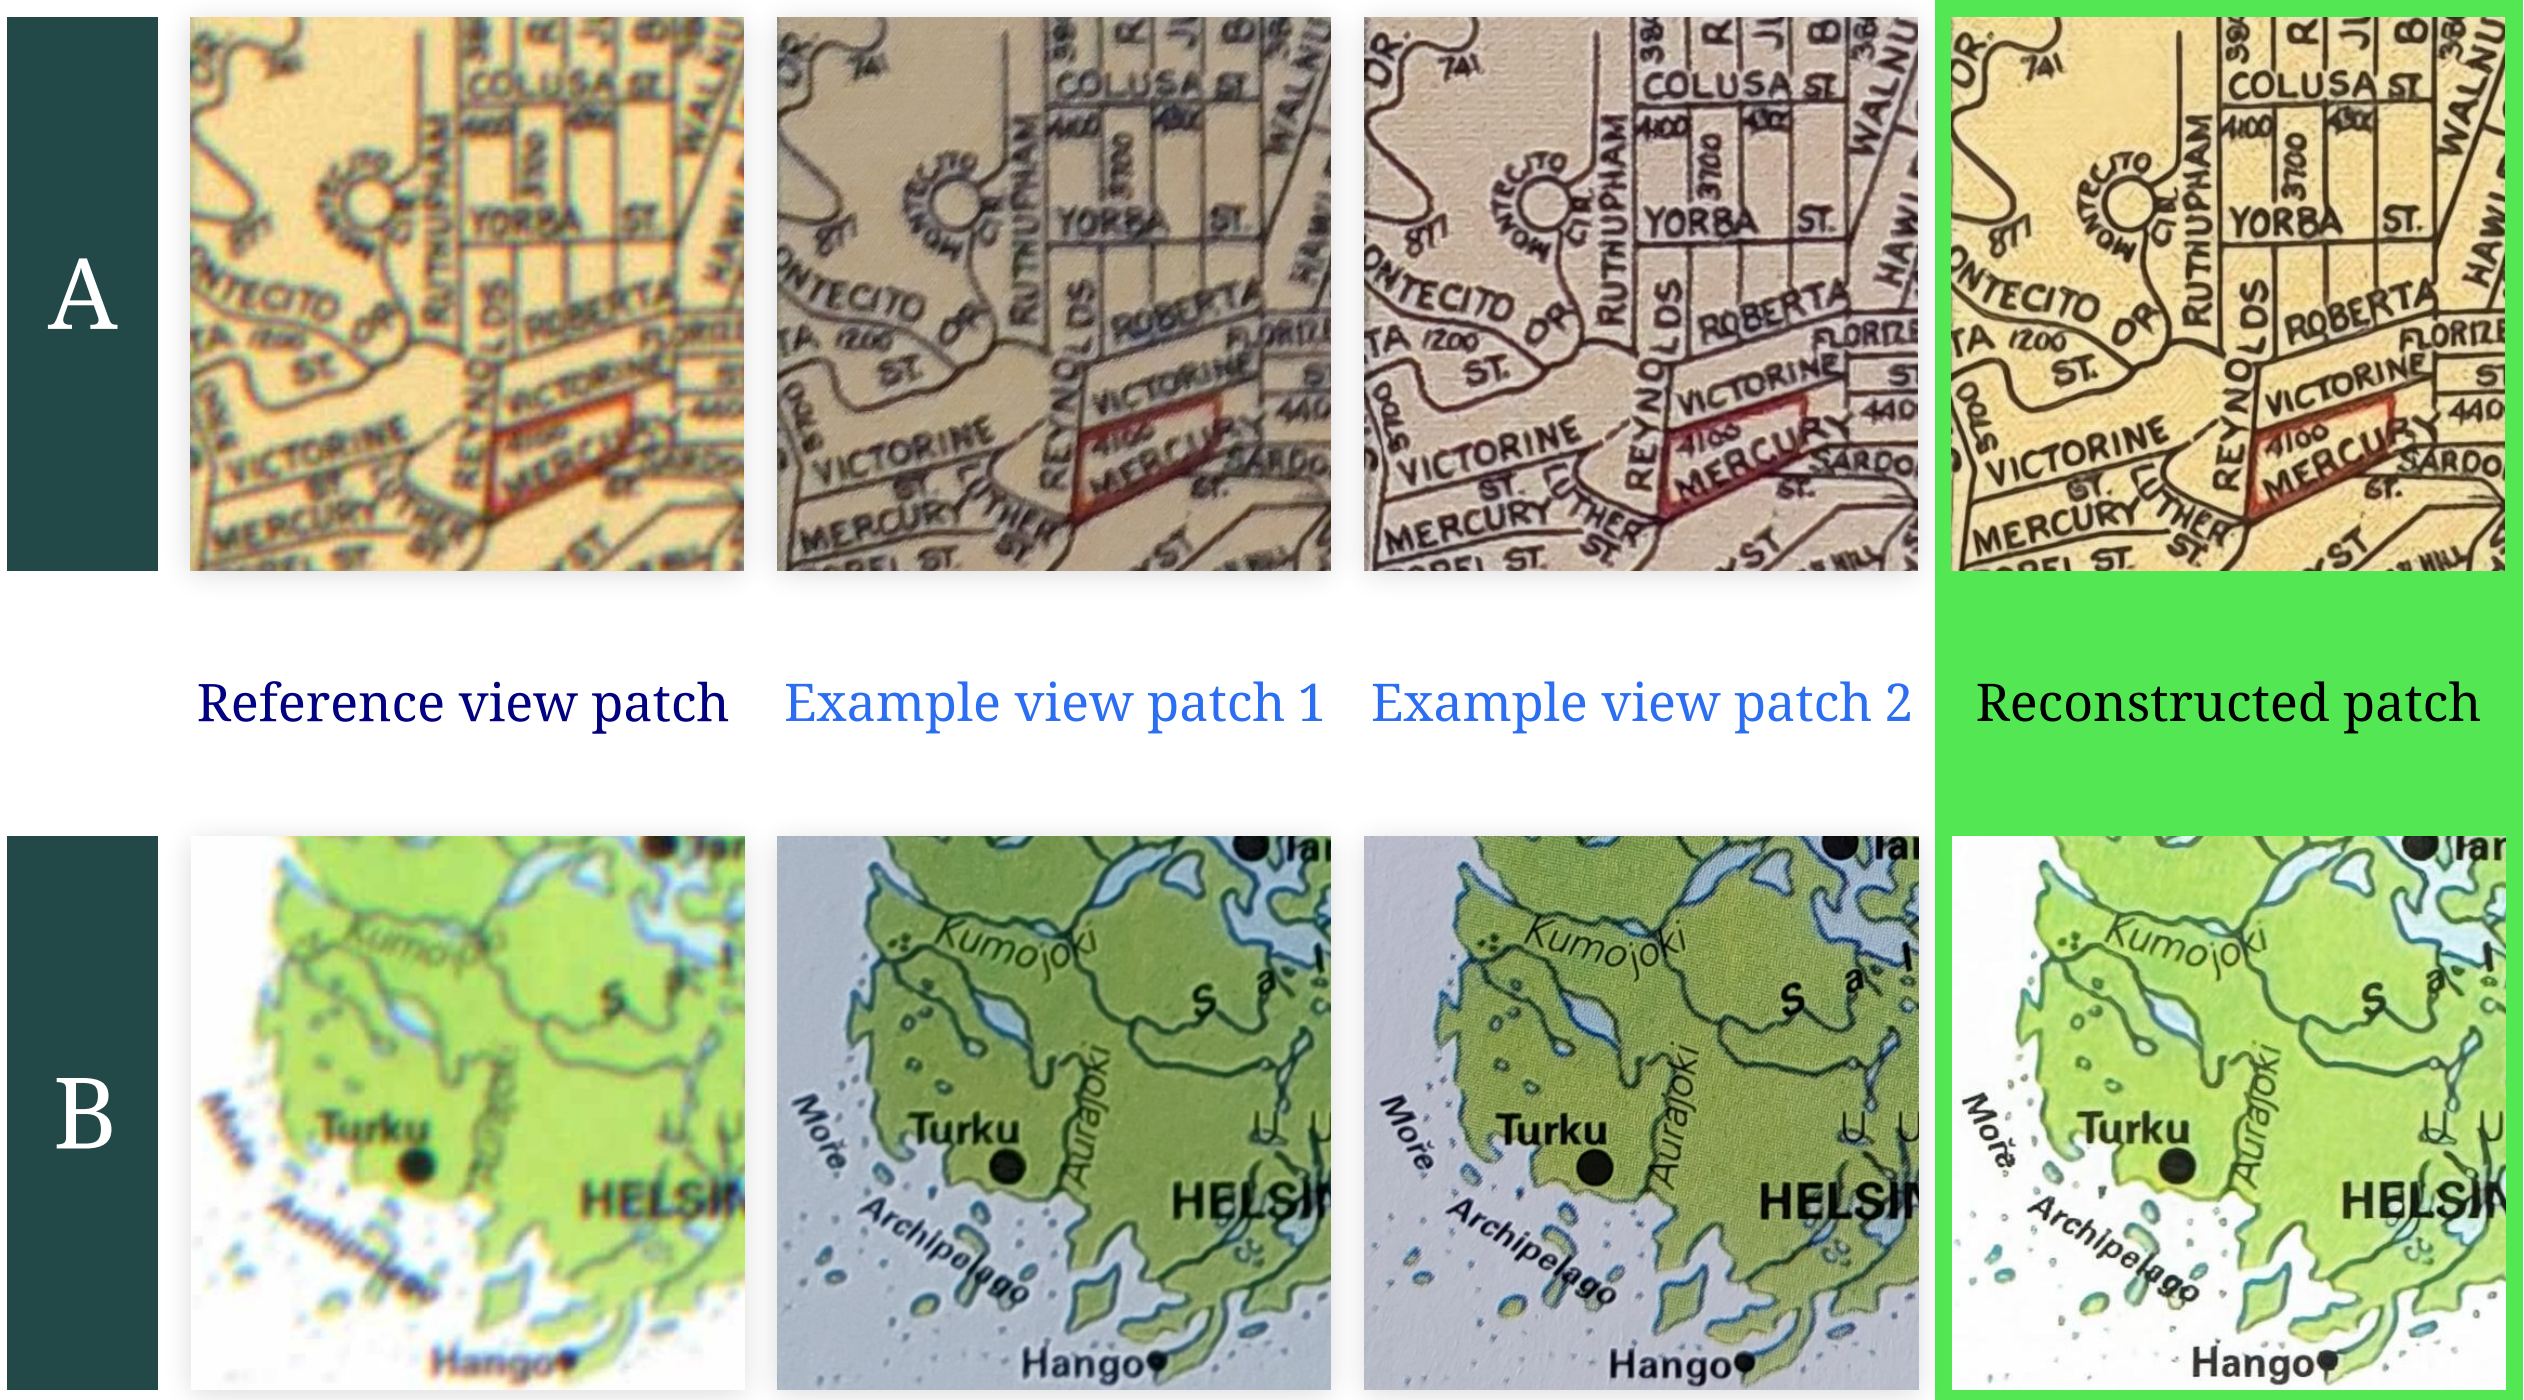


Figure 4

